

ATNC 550



THE BEST COMBINATION OF
PRECISION
AND **COMFORT**



ATNC 550

NON-CONTACT TONOMETER




Optometry



THE BEST COMBINATION OF PRECISION AND COMFORT



ATNC 550 is a quiet and precise non-contact tonometer. It combines IOP measurement with corneal thickness data for a more reliable glaucoma screening. With its compact design and tilting screen, it fits perfectly in any practice.

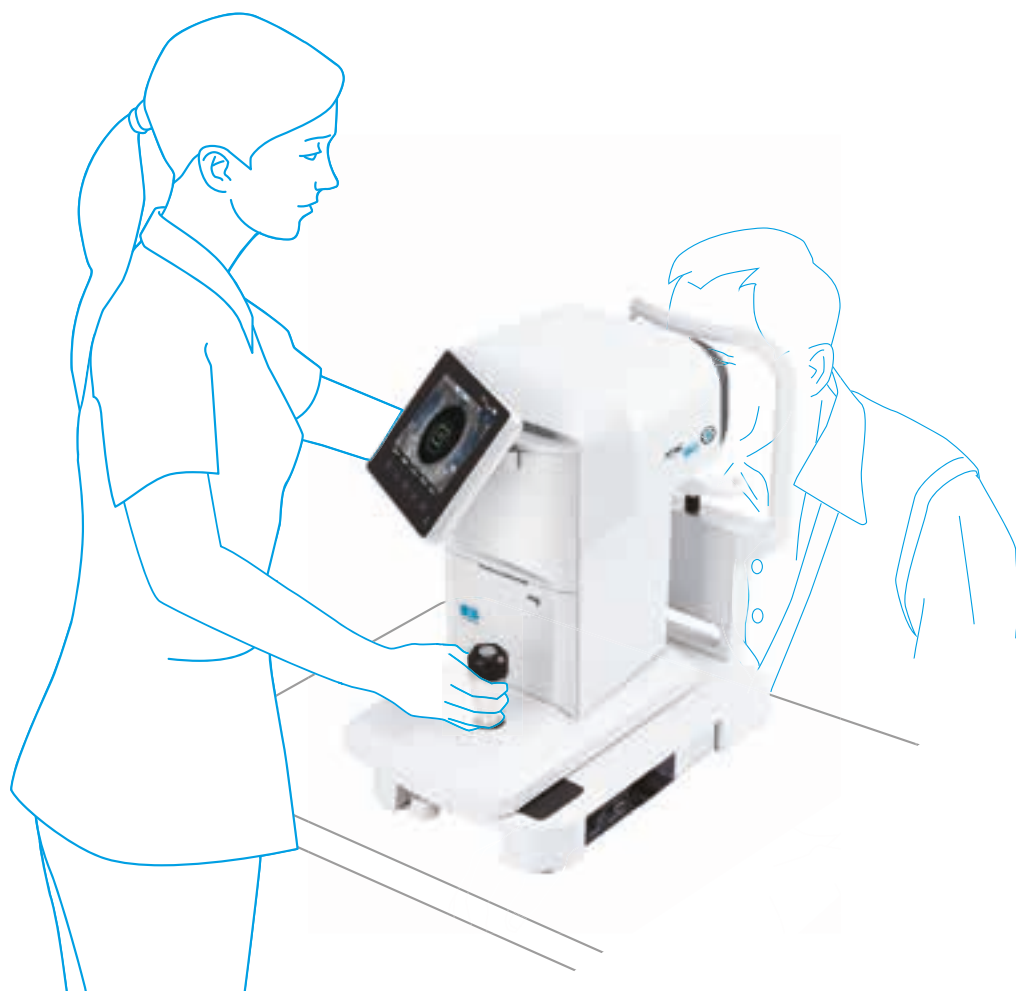

FLEXIBLE AND EASY OPERATION

- The ATNC 550 can comfortably be operated from both seated and standing positions.
- The screen can be tilted up, down and laterally to facilitate interaction with patient.
- The unit is easy to use thanks to the feather touch sensor button.



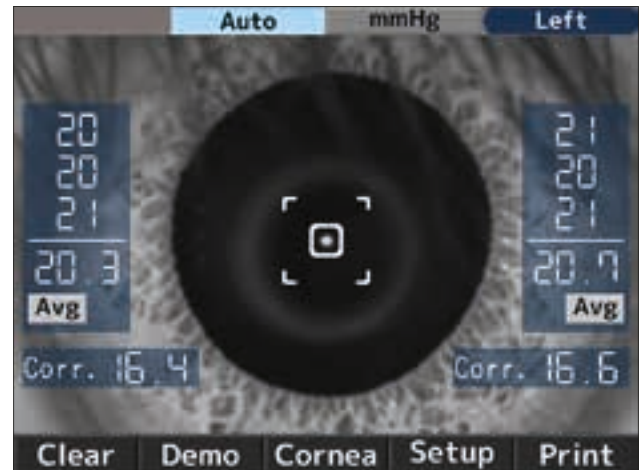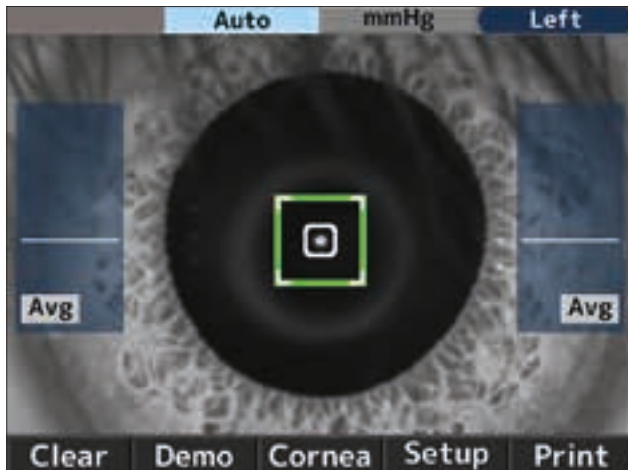

ACCURATE DIAGNOSIS

- The measurement is taken with speed and simplicity to reduce patient stress, without compromising accuracy.
- Guided alignment and auto-shoot: Once aligned the target turns green, air pulse and measurement start automatically.
- The IOP value is corrected automatically by simply inputting the central corneal thickness. The data can be entered either before or after the measurement.
- Reliability Warning Display: When measurement is not reliable enough, an asterisk appears on the screen.



IOP COMPENSATION BASED ON CCT VALUES

- + By entering patient's central corneal thickness [CCT], the operator can compensate the patient's intraocular pressure [IOP].
- + It reduces the risk to overestimate or underestimate patient's IOP. It is particularly relevant in glaucoma diagnosis and follow-up.

Right CCT(μm)	5	7	2
Left CCT(μm)	5	7	4



ENHANCED PATIENT COMFORT

- The measurement time is kept to a minimum reducing patient stress.
- The ATNC 550 also provides a quiet and soft air puff to enhance patient comfort.
- An alarm is triggered to prevent contact with the patient's eye when the nozzle is too close.

SPECIFICATIONS

INTRAOCULAR PRESSURE MEASUREMENT		SHIFTING AND ADJUSTEMENT RANGE	
Range	1 to 60 mm Hg or 0.1 to 8.0 kPa (The measurement values which are less than 7mmHg cannot be guaranteed.)	Measurement unit	Back/forth ±22 mm Right/left ±43 mm Up/down ±17 mm
Resolution	1 mmHg or 0.1 kPa	Chinrest	Vertical adjustment ±30 mm
Accuracy	±5 mmHg or ±0.7 kPa		
Working distance	11 mm		
PRINTER	Thermal printer (paper width 58 mm)	BUILT-IN MONITOR	5.7" LCD color monitor
OUTPUT	RS-232C interface	POWER SUPPLY	100 to 240 V. 50/60 Hz
DIMENSION AND WEIGHT	240(W) mm x 430(H) mm x 422(D) mm Approx. 13 kg	POWER SAVING FUNCTION	3, 5, 10 min (switchable)
			CE marking conformity



PRODUCT FUNCTIONS



Tn Tonometry



Regulated air puff



CCT Compensation



Essilor International
64 bis, avenue Aubert
94306 Vincennes Cedex France
Tel: 33 (0)1 72 94 71 00
Fax: 33 (0)1 72 94 70 27
www.essilor-instruments.com

Your contact: